



161722 Power pack




Mobile power technical parameter

Type Batteries	Lithium-ion batteries (Panasonic original import)
Capacity	10000mA
DC Input	5V / 10W
DC Output	7W
Charging Method	Constant current (CC) 2A (0.2C) to 4.2V cut-off charge
	Constant Voltage (CV) 4.2V 100mA to charge off
	10A(1C) Charging
Charging times	>800 cycles
Charge / Discharge Interface	DC2.1 * 5.5 male
Shockproof Level	6G
Waterproof Level	IP66
Charging Working Temperature	0° to +40°
Discharge Working Temperature	-20° to +60°
Storage Temperature	-40° to +60°
Dimensions (mm)	95 mm x 72 mm x 29 mm (without tails)
Weight (g)	280 g


Mobile power supply

How to use

- Use conventional digital product power adapter, PC USB to charge equipment. Voltage range: DC5V/10W.
- Charge indicator: Red light flash below 25%/ yellow below 50%/ blue below 100%.

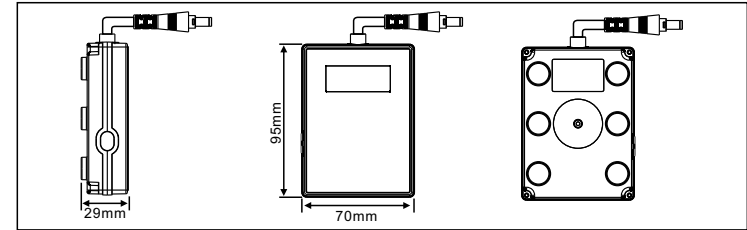

- Connect monitor camera to interface of mobile power . press on/ off button to start charge.
- Discharge indicator: green light on 100%/ blue light on 75%/ red light on 25%.

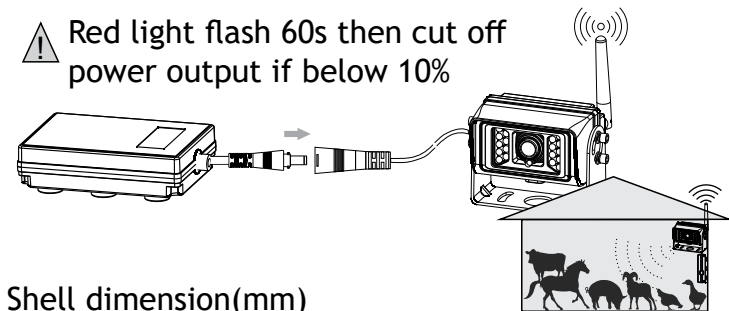

Shell dimension(mm)

